




HP 46020

HP-MIL slave
1RC8

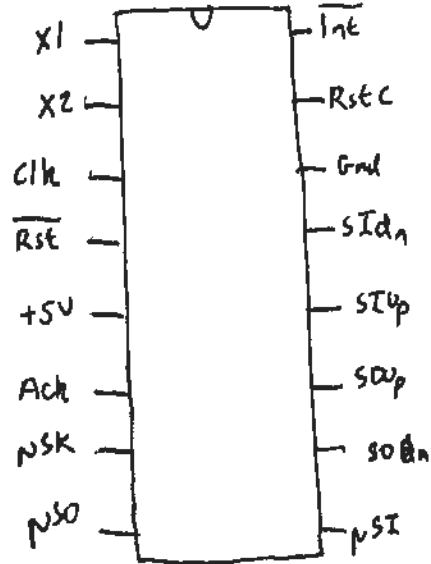

Keyswitch

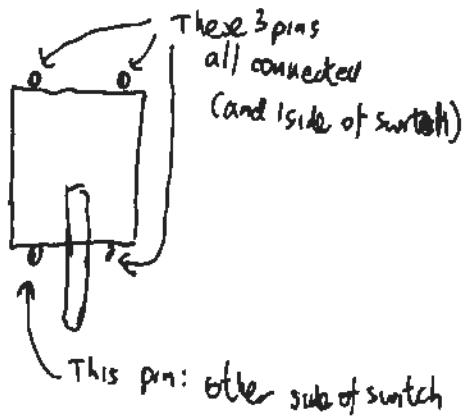

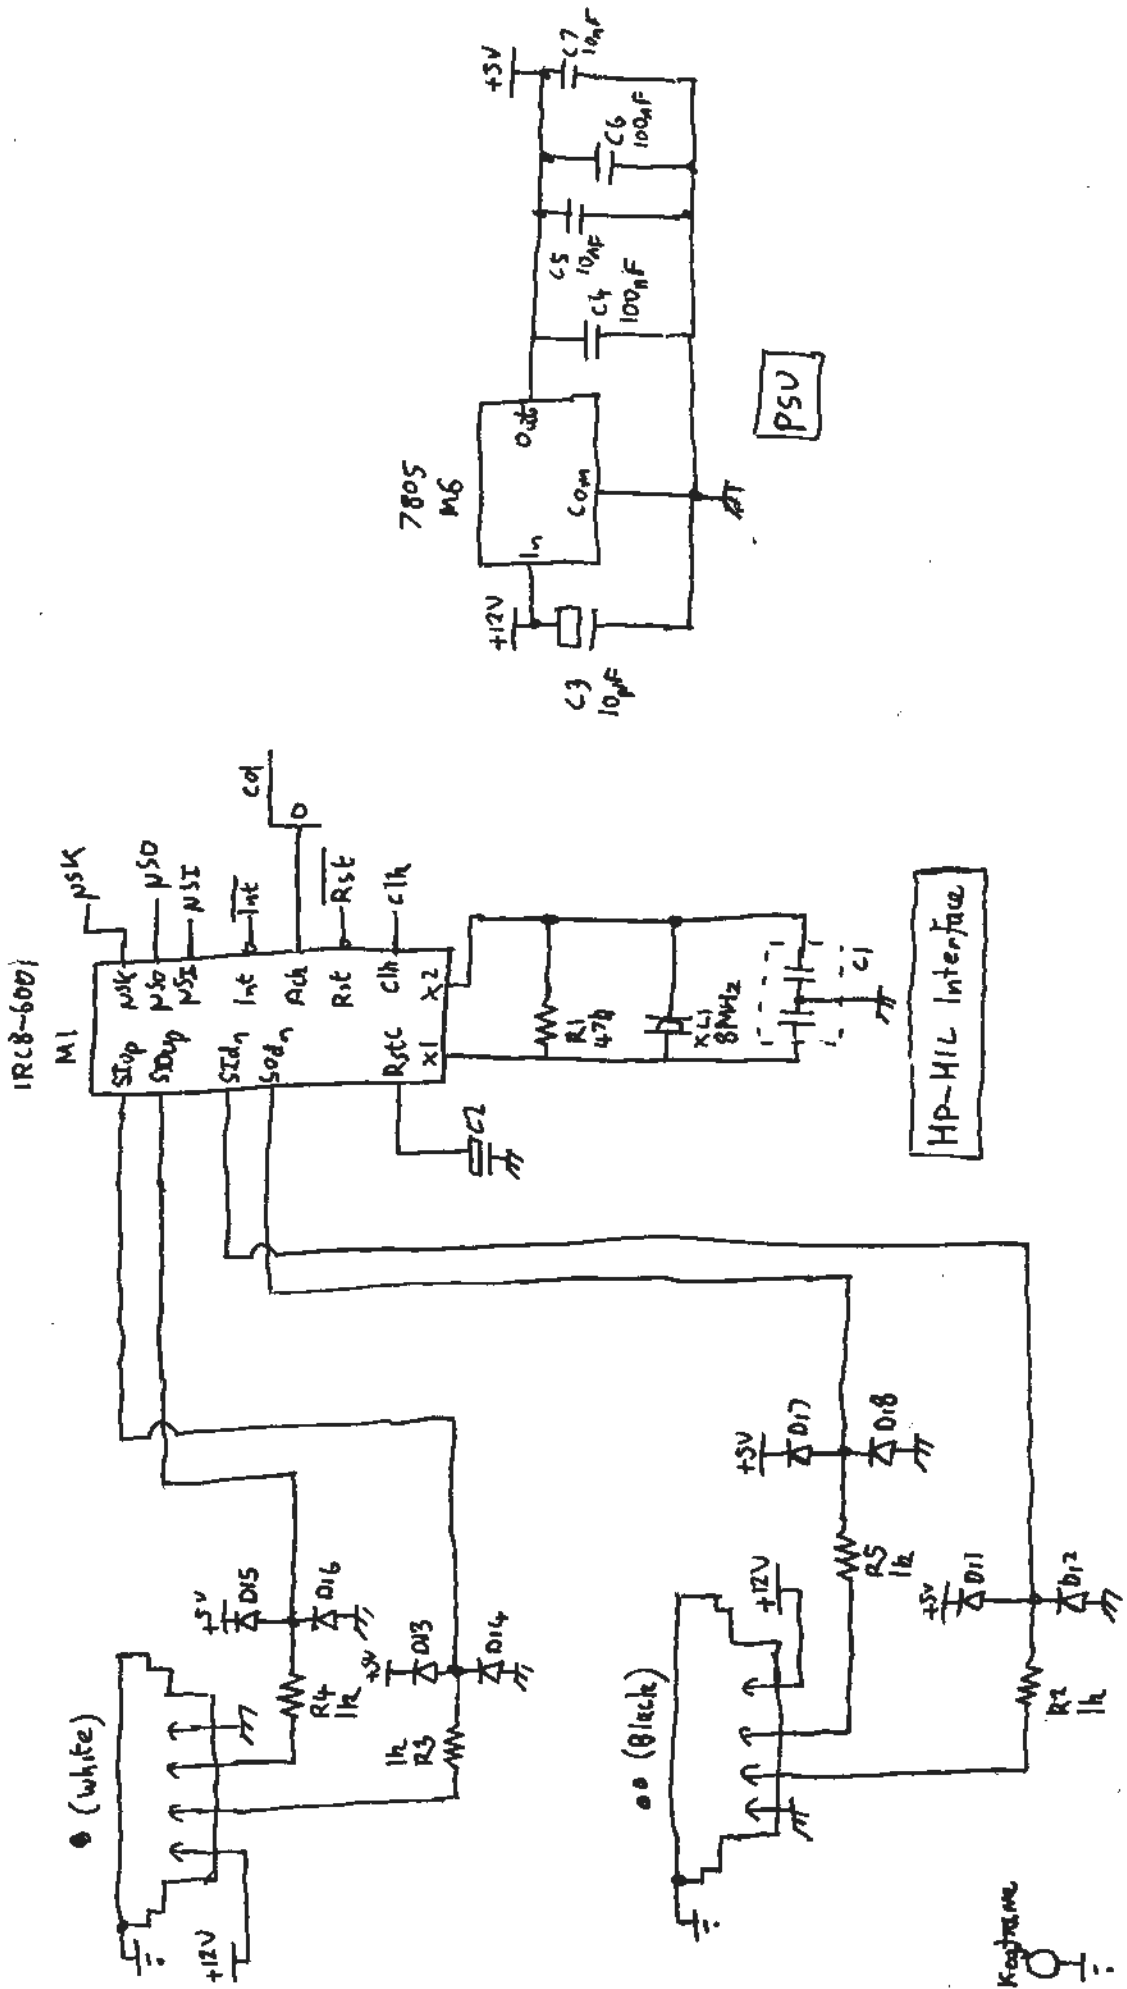

0	A07	B09	C09	D09	E09	F08	G08	H08	I08	J08	K08	L08	M08	N08	O08	P08
1	A06	B10	C10	D10	E10	F04	G04	H04	I04	J04	K04	L04	M04	N04	O04	P04
2	A05	B11	C11	D11	E11	F05	G05	H05	I05	J05	K05	L05	M05	N05	O05	P05
3	A04	B12	C12	D12	E12	F06	G06	H06	I06	J06	K06	L06	M06	N06	O06	P06
4	A03	B13	C13	D13	E13	F07	G07	H07	I07	J07	K07	L07	M07	N07	O07	P07
5	A02	B14	C14	D14	E14	F08	G08	H08	I08	J08	K08	L08	M08	N08	O08	P08
6	A01	B15	C15	D15	E15	F09	G09	H09	I09	J09	K09	L09	M09	N09	O09	P09
7	F01	B16	C16	D16	E16	F09	G09	H09	I09	J09	K09	L09	M09	N09	O09	P09



Key Matrix

HP46020 Keyswitch Assignments (1)

	Col	Row		Col	Row
A01	8	7	B01	15	7
A02	1	6	B02	15	6
A03	1	4	B03	15	5
A04	1	3	B04	15	4
A05	1	2	B05	15	3
A06	1	1	B06	15	2
A07	1	0	B07	15	1
A08	2	0	B08	15	0
A09	2	1	B09	3	0
A10	2	2	B10	3	1
A11	2	3	B11	3	2
A12	2	4	B12	3	3
A13	2	6	B13	3	4
A14	2	7	B14	3	5
A15	12	5	B15	3	6
A16	12	1	B16	3	7
A17	12	3	B17	10	5
A18	12	7	B18	10	1
			B19	10	3
			B20	10	7

HP46020 Key Switch Assignments (2)

	Col	Row		Col	Row
C01	14	7	D01	13	7
C02	14	6	D02	8	6
C03	14	5	D03	13	5
C04	14	4	D04	13	4
C05	14	3	D05	13	3
C06	14	2	D06	13	2
C07	14	1	D07	13	1
C08	14	0	D08	13	0
C09	4	0	D09	5	0
C10	4	1	D10	5	1
C11	4	2	D11	5	2
C12	4	3	D12	5	3
C13	4	4	D13	5	4
C14	4	5	D14	5	5
C15	4	6	D15	5	6
C16	4	7	D16	5	7
C17	9	5	D17	9	0
C18	9	1	D18	9	2
C19	9	3	D19	9	4
C20	9	7	D20	9	6

HP 46020 Keyswitch Assignments (3)

	Col	Row		Col	Row
E01	11	7	F01	1	7
E02	8	5	F02	11	5
E03	11	4	F03	8	3
E04	11	3	F04	7	1
E05	11	2	F05	8	2
E06	11	1	F06	7	3
E07	11	0	F07	7	4
E08	7	0	F08	7	5
E09	6	0	F09	7	7
E10	6	1	F10	10	6
E11	6	2	F11	12	4
E12	6	3			
E13	8	4			
E14	6	5			
E15	7	6			
E16	6	7			
E17	10	0			
E18	10	2			
E19	10	4			
E20	12	6			

A01	A02	A03	A04	A05	A06	A07	A08	A09	A10	A11	A12	A13	A14	A15	A16	A17	A18
B01	B02	B03	B04	B05	B06	B07	B08	B09	B10	B11	B12	B13	B14	B15	B16	B17	B18
C01	C02	C03	C04	C05	C06	C07	C08	C09	C10	C11	C12	C13	C14	C15	C16	C17	C18
D01	D02	D03	D04	D05	D06	D07	D08	D09	D10	D11	D12	D13	D14	D15	D16	D17	D18
E01	E02	E03	E04	E05	E06	E07	E08	E09	E10	E11	E12	E13	E14	E15	E16	E17	E18
F01	F02	F03	F04			F05	F06	F07	F08	F09	F10	F11					

HP-H1L Keyboard

HP4602a

Key switch Layout

10 Dishes

- D19 -
- D10 -
- D11 -
- D12 -
- D13 -
- D14 -
- D15 -

N/A

10 Byte =

Print Stop	F1	F2	F3	F4	Menu	Use system	F6	F7	F8	Char time	Char display	
~	" 3	4	% 5	6	7	8	9	0	/ +	Back space	Delete line	
Tab	Q	W	E	R	T	Y	U	I	O	P	Insert line	Delete char
Capl CTRL	A	S	D	F	G	H	J	K	L	Return	Prev	Next
DEL Shift ESC	Z	X	C	V	B	N	M	;	:	Shift select	Next	
Print Enter	Space bar										Extend char	Extend char
	*	/	7	8	9	4	5	6	1	2	3	.

HP-HIL Keyboard

HP46020

UK key caps

10 Diodes

- Di9 - In
- Di10 - In
- Di11 - In
- Di12 - Out
- Di13 - In
- Di14 - In
- Di15 - In

10 Byte = D7